


SERIES B1481

SILICON HIGH VOLTAGE RECTIFIER

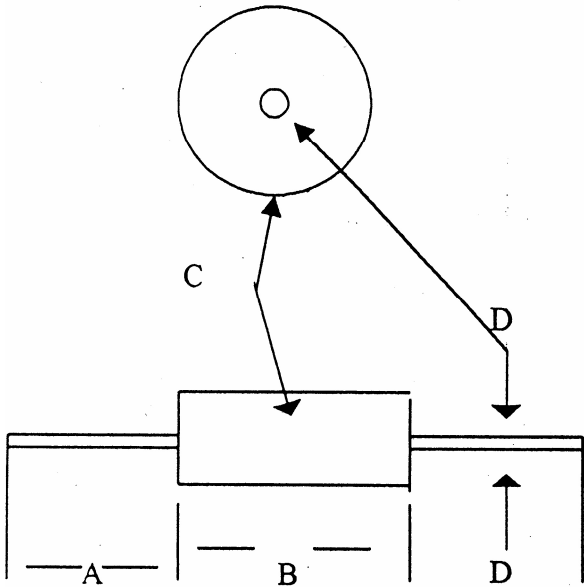

DIM	INCHES
A	.750
B	.375
C	.270
D	.050

BODY: MOLDED BLACK EPOXY
 LEADS: SILVER PLATED COPPER
 MARKING: POLARITY BAND, P/N, DATE CODE

PART NUMBER	PIV VOLTS	I_o AMPS **	$V_f @ I_o @ 25^\circ C$	$I_r @ PIV @ 25^\circ C$	MAX SINGLE CYCLE SURGE CURRENT	T_{rr}
B1481-20	2000	1.5	4.0	10 μ A	100 AMPS	150 nSec
B1481-30	3000	1.5	6.0	10 μ A	100 AMPS	150 nSec
B1481-40	4000	1.0	8.0	10 μ A	100 AMPS	150 nSec
B1481-50	5000	.800	10.0	10 μ A	100 AMPS	150 nSec
B1481-60	6000	.750	12.0	10 μ A	100 AMPS	150 nSec
B1481-70	7000	.600	13.0	10 μ A	100 AMPS	150 nSec
B1481-80	8000	.500	15.0	10 μ A	100 AMPS	150 nSec

RECOVERY TIME (T_{rr}) MEASURED $I_f = .5A / I_r = 1A / I_{rr} = .25A$

MAXIMUM AMBIENT OPERATING TEMPERATURE, $-55^\circ C$ TO $+125^\circ C$

** IN OIL $T = 55^\circ C$

(203) 467-2591 TEL
 (203) 469-5928 FAX
 Email: Info@ edal.com
 Internet: <http://www.edal.com>

EDAL® INDUSTRIES
 INC. SINCE 1958

51 Commerce St. East Haven, CT 06512