


# SERIES BS697



## SUB-MINIATURE SILICON HIGH VOLTAGE RECTIFIER

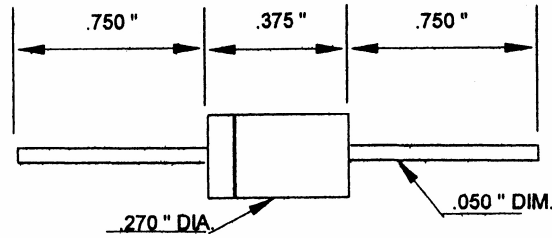

PART NUMBER	PIV VOLTS	$I_O$ AMPS 50° C	$V_f$ @ $I_O$ @ 25° C	$I_r$ @ PIV @ 25° C	MAX SINGLE CYCLE SURGE CURRENT	$T_{rr}$
BS697-20	2000	1.5	4.5	10 $\mu$ A	250 AMPS	150 nSec
BS697-25	2500	1.5	6.0	10 $\mu$ A	250 AMPS	150 nSec
BS697-30	3000	1.5	6.0	10 $\mu$ A	250 AMPS	150 nSec

Maximum Ambient Operating Temperature  $-55^{\circ}$  C to  $+125^{\circ}$  C  
 Recovery Time: .5 Amp Forward to 1 Amp Reverse Recover to .25 Amp

OUTPUT CURRENT vs AMBIENT TEMPERATURE

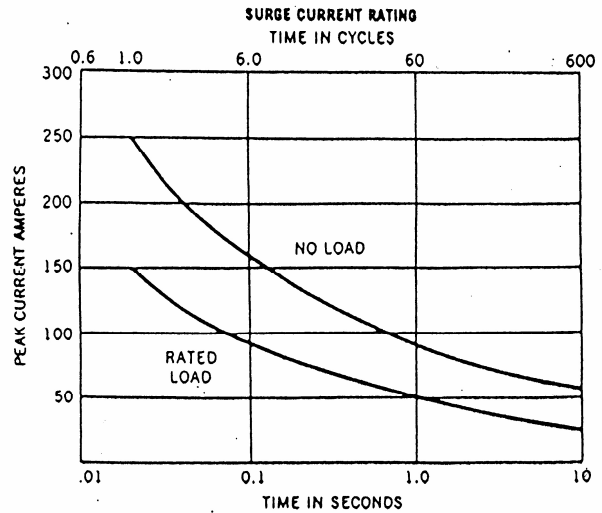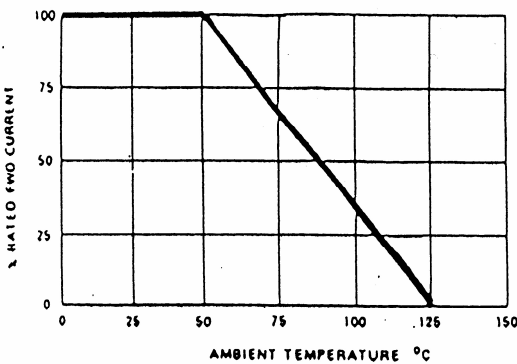

(203) 467-2591 TEL  
 (203) 469-5928 FAX  
 Email: Info@ edal.com  
 Internet: <http://www.edal.com>

**EDAL<sup>®</sup> INDUSTRIES**  
**INC.** SINCE 1958

51 Commerce St. East Haven, CT 06512